


SEM03

Keypad RFID Access Control



Proximity Card

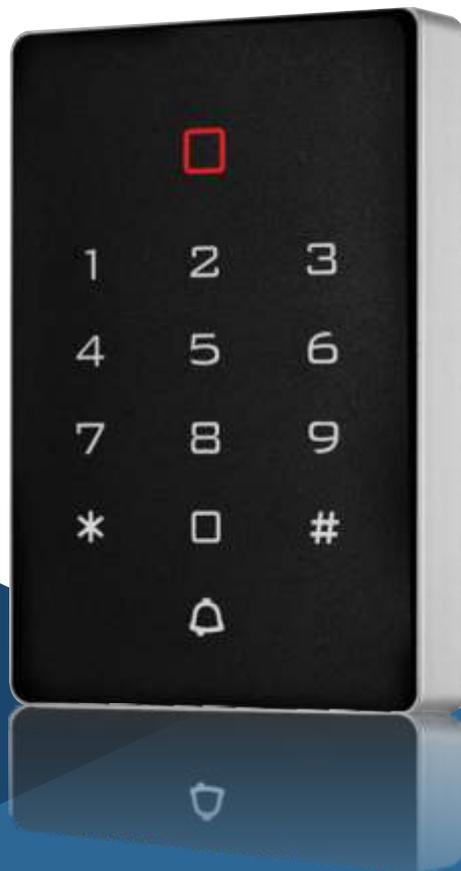

Password



Education



Retail



Government



Health



Logistics



Bank



Office



Factory

Technical Specifications

SEM03

Card Type	Proximity
Working Voltage	DC12V \pm 10%
Reading Range	3-6cm
Humidity	10% to 90% RH
Door Opening Time	0-99s(Adjustable)
Static Electricity	\leq 30mA
Ambient Temperature	-45°C-60°C
Electric Lock Output	\leq 1A
Short-Circuit Protect	\leq 100uS
Dimensions	114x75x16mm
Data Backup	Only two same device using D0 & D1

The device is standalone access control and proximity card reader which supports Proximity card. It builds - in STC Microprocessor, with strong anti-interference ability high security and reliability powerful function and convenient operation its widely used in high end buildings residential communities and other public places.

Product Feature

- WG26/WG34 adjustable by end user under reader mode
- Capacity: 500 users, Touch Button keypad
- Plastic case, indoor used
- Access Way: Password & Card
- Relay Toggle Mode
- Master cards are available
- Data backup